



Toll Free: 87 PERMATEX
(877-376-2839)

10 Columbus Blvd., Hartford,
Connecticut 06106

6875 Parkland Boulevard, Solon
Ohio 44139

Technical Data Sheet

Permatex® Liquid Solder

AAM Revised 11/02

PRODUCT DESCRIPTION

S.I.N.: 834-300

Permatex® Liquid Solder is a specially blended adhesive that adheres to practically any surface. It applies soft and quickly dries into a metal-tough, weather resistant bond. It is ideal for stopping leaks and repairing split seams in metal. Liquid Solder resists water, oil and gasoline. Fills small holes or rust perforations.

PRODUCT BENEFITS


- Easy to use
- No measuring or mixing
- No heating
- Contains no conductive metal

TYPICAL APPLICATIONS

- Broken weld lines
- Trunk compartment or other body parts
- Battery trays
- Floor panels

DIRECTIONS FOR USE

1. Surfaces should be dry and free of oil or dirt.
2. Apply a bead of Liquid Solder to both sides of area being repaired.

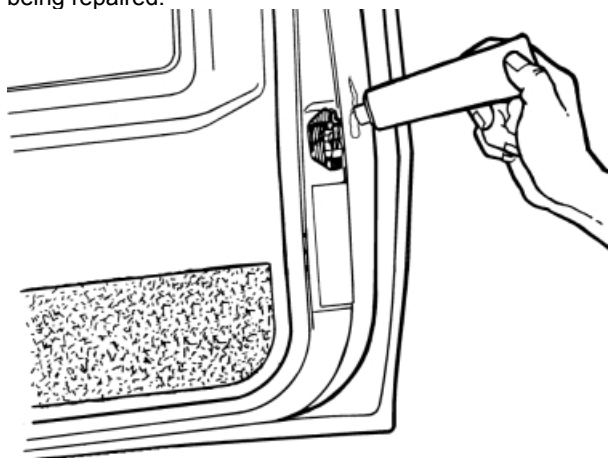

4. Allow overnight drying before use.

PROPERTIES OF UNCURED MATERIAL

	Typical Value
Chemical Type	Vinyl resin
Appearance	Aluminum liquid
Odor	Penetrating
Specific Gravity	0.93
Viscosity	Flow similar to honey
Flash Point, TCC, °F	0

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

ORDERING INFORMATION

Part Number	Container Size
25906	1.5fl. oz. tube, carded

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8_ to 28_C (46_ to 82_F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.

NOT FOR PRODUCT SPECIFICATIONS.

THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.

PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.
PERMATEX, INC., HARTFORD SQUARE NORTH, 10 COLUMBUS BOULEVARD, HARTFORD, CT 06106 PHONE - (1-87PERMATEX)