



**amazon**  
basics

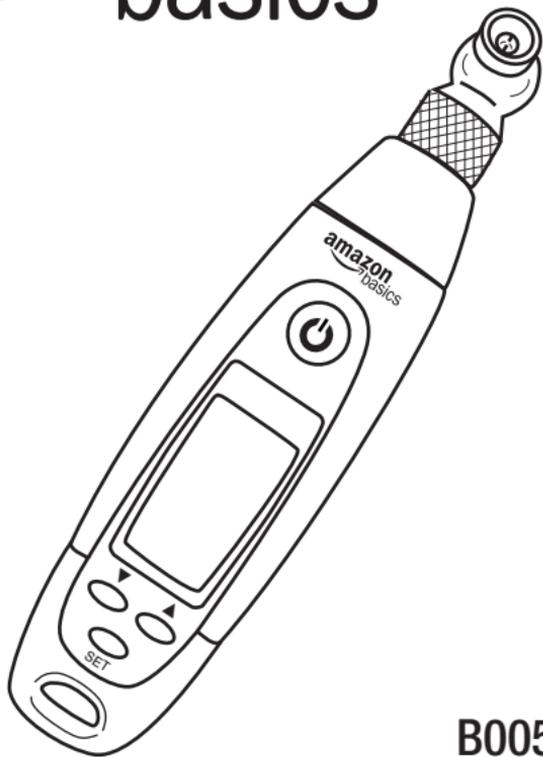

**B005PJJ89U**

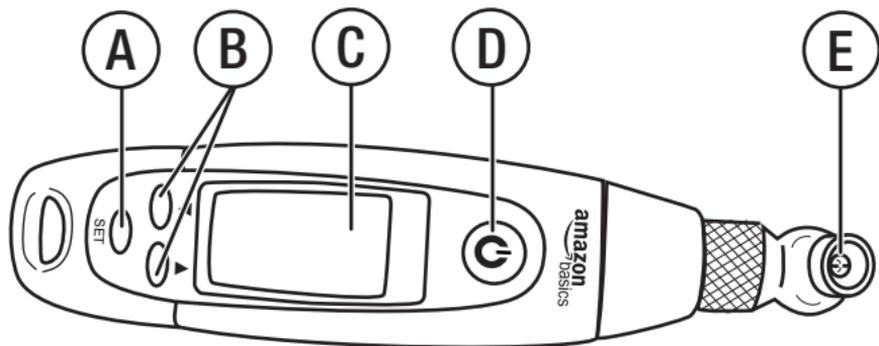

<b>A</b>	<b>Set button</b>	<b>Turns gauge on/sets choices</b>
<b>B</b>	<b>Up/Down buttons</b>	<b>Increases/decreases setting options</b>
<b>C</b>	<b>LCD display</b>	<b>Displays selections/readings</b>
<b>D</b>	<b>Flashlight power button</b>	<b>Turns LED flashlight on/off</b>
<b>E</b>	<b>Nozzle</b>	<b>Releases air/reads tire pressure</b>



## Instruction Manual

### AmazonBasics Programmable Digital Tire Gauge

---

#### Features

- Program your vehicle's tire pressure volume
- Fine tune tire pressure with air-bleed function
- Reach awkward angles with the swivel head
- Easy-to-read, extra large backlight display
- Built-in white LED flashlight on tip

To use:

## Measuring pressure

1. Press **Set**. The display lights and “0.0” appears. The default unit of measure is PSI.



2. Remove the cap from your tire valve.
3. Push and hold the nozzle on the gauge against the valve stem until the pressure reading is displayed and locked.



4. Remove the gauge from the valve stem. The pressure reading stays on the display for 10 seconds. The display returns to the “0.0” reading, then turns off after 10 seconds.

## Over range error



If your tire pressure is more than 99.5psi/ 6.90bar, the display will show an “E.”

## Setting a target for tire pressure level


Note: The target numbers you set are reminders of your vehicle manufacturer's suggested tire pressure levels. They cannot be used to test for or indicate actual pressure in tires.

To find your vehicle manufacturer's suggested tire pressure levels see your vehicle owner's manual.


1. Press **Set**. The display lights and “0.0” appears.



2. Press **Set** again and hold for 3 seconds. The unit “PSI” or “BAR” appears and blinks. Press ▼ or ▲ to switch between PSI and BAR. Then, press **Set** to confirm your selection.

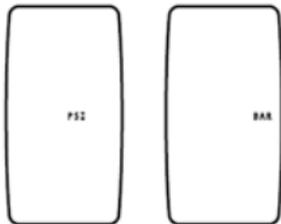

The icon indicating front or rear tire lights and blinks.

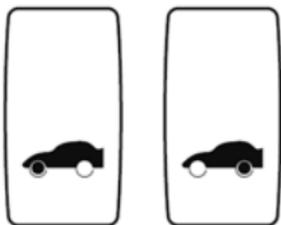

3. Press ▼ or ▲ to choose front or rear tire, then press **Set** to confirm.

4. Press ▼ or ▲ to change the target number you want, then press **Set** to confirm. The icon for the next tire is displayed.



5. Press ▼ or ▲ to to select your target number, then press **Set** to confirm.



6. Your target numbers for both tires light for about 2 seconds, then the display returns to “0.0”.



### Measuring pressure with a preset target

1. Press **Set**. The display lights and “0.0” appears.



2. Press ▼ or ▲ to choose between the front and rear tires.



3. Push and hold the nozzle on the gauge against the valve stem until the pressure reading is displayed and locked.



4. Remove the gauge from the valve stem. The current pressure reading appears on the top of the display and your target reading appears on the bottom for 10 seconds.

5. When the display returns to “0.0”, repeat steps for the other tires.
6. After your final reading the display returns to “0.0” and turns off after 10 seconds.

### Using the white LED flashlight

Press and hold the power button to turn on the light.  
Release the power button to turn off the light.

### Low battery warning:

When the batteries are nearly expended the panel will display “Lo.”



## Replacing the Batteries:

1. Remove the battery door on the back using a Phillips head screwdriver to remove the black screw.
2. Replace old batteries with two CR2032 batteries (or equivalent) matching +/- polarity as marked.
3. Replace the cover and tighten the screw.

### BATTERY WARNING STATEMENT

- Keep batteries out of the reach of children.
- Insert the batteries in the proper direction as indicated by positive (+) and negative (-) markings in battery compartment.
- Do not mix old and new batteries or batteries of different types (for example, carbon and alkaline batteries).
- Always remove old, weak, or worn-out batteries promptly and recycle or dispose of them in accordance with Local and National Disposal Regulations.
- If a battery leaks, remove all batteries and recycle or dispose of them in accordance with battery manufacturer's instructions and Local and National Disposal Regulations. Before inserting new batteries, thoroughly clean compartment with a damp paper towel or follow battery manufacturer's recommendations for cleanup. If fluid from the battery comes into contact with skin or clothes, flush with water immediately.
- Remove batteries if your device is to be stored for an extended period of time without being used.

### PRODUCT DISPOSAL INFORMATION

Dispose of this product in accordance with Local and National Disposal Regulations.

### FEDERAL COMMUNICATIONS COMMISSION (FCC) STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

**amazon**  
basics