




Tow-N-See™

Power Mirror Extender

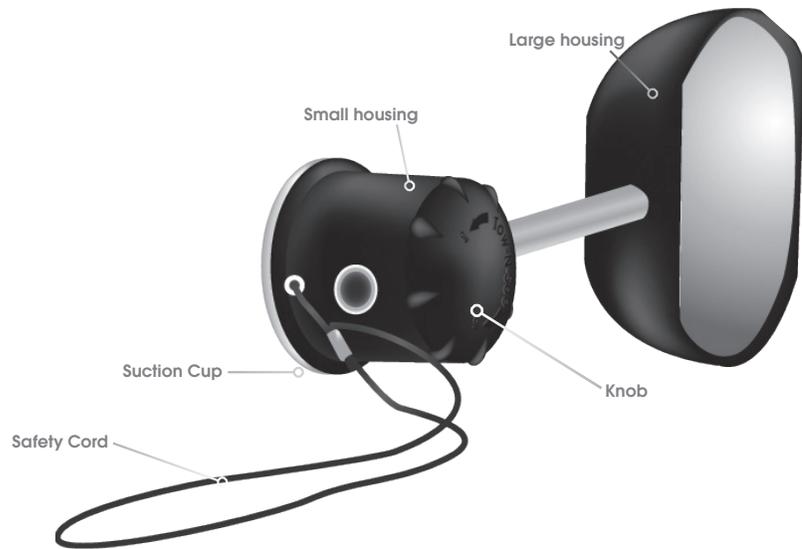

INSTRUCTIONS

To attach Tow-N-See Mirror

1. Clean vehicle mirror and sealing surface of suction cup.
2. Place safety cord loop around throat of vehicle mirror.
3. Lightly press suction cup against vehicle mirror, rotate knob counterclockwise to flatten until small housing starts to wobble, then turn knob clockwise until the unit is firmly attached. (Approximately 2 - 2 1/2 full turns.)
4. Adjust Tow-N-See to desired position with the power mirror controls of your vehicle.

To remove Tow-N-See Mirror

1. Rotate knob counterclockwise to the wobble point.
2. Push knob to break vacuum seal.
3. Remove safety cord and mirror together from vehicle.

The user is responsible for installing Tow-N-See Mirror correctly. The manufacturer is not responsible for any damage, directly or indirectly, caused by an improperly installed towing mirror.

CAUTION: Always use the safety cord to prevent accidents in case unit loses its vacuum.

WARNING: NEVER PLACE THE SUCTION CUP ON ANY ETCHED, SCRATCHED, CRACKED OR OTHERWISE DAMAGED SURFACE. DO NOT PLACE TOW-N-SEE ANYWHERE BUT ON THE VEHICLE'S MIRROR. DO NOT ATTACH TOW-N-SEE TO VEHICLE MIRROR IF THE SUCTION CUP IS DAMAGED OR CRACKED. IF TOW-N-SEE MIRROR SHOULD SLIDE OR LOSE ITS VACUUM, DO NOT ATTEMPT TO CORRECT WHILE THE VEHICLE IS MOVING.



CAMCO MANUFACTURING, INC.
121 LANDMARK DRIVE / GREENSBORO, NC 27409
1-800-334-2004 / WWW.CAMCO.NET

#1113

zC885065