

**Rack It Up!**<sup>™</sup>



# Utensil Bar



**IMPORTANT!**

Enclume Design Products is committed to the highest quality in the manufacture of this **RACK IT UP!** pot rack. The components of each rack are carefully inspected before shipment.

However, in case there is a problem, PLEASE LET US HELP YOU FIRST. Do not return the item to where you purchased it. First, call us and explain what is missing or wrong. We will do our best to help with any question or problem you have—and as fast as possible.

Call us TOLL FREE 1 (877) 362-5863 and ask for customer service. Thank you!

**TOOLS NEEDED** - We provide all tools required for assembly: hex wrench, fastener hardware (nuts, bolts). Note under attaching instructions on page 3 of this booklet, the list of tools you will need to provide.

**RACK IT UP! 5-Year Limited Warranty**


This product is warranted to be free of material defects for a period of five years from the date of purchase. Your exclusive remedy is the repair or replacement of the defective product, and shall be subject to the following conditions: (1) You send a notice of any defect to Enclume within the warranty period, and (2) You return the defective product, to Enclume Design Products, Inc., 24 Colwell Street, Port Hadlock, WA 98339, *postage prepaid*, within 20 days following receiving a return authorization number. (A return authorization number may be obtained from Enclume by calling the number at the bottom of this booklet.) There are no other warranties expressed or implied. There are no warranties of merchantability or fitness for a particular purpose. Enclume specifically disclaims any and all incidental or consequential damages arising out of purchase, installation or use of this product.



# How To Attach Utensil Bar to Wall

*TIP! FIRST, REMOVE PAINT FROM BOLT HOLES. Because the powder coat finish applied at the factory also adheres to the inside of bolt holes, pushing a bolt through it during assembly may be difficult. Therefore, before connecting parts, we recommend that you check to see that bolts slip easily through all holes. If they do not, carefully clear paint from holes in side bars, ends and arms using a small knife.*

*SECOND, be certain that barrel nuts and bolts screw together easily BEFORE beginning assembly. Residue from the black finish may cause some bolts to stick a bit, therefore use the two hex wrenches enclosed (one for each end of the barrel) and screw them together to clear away extra paint.*

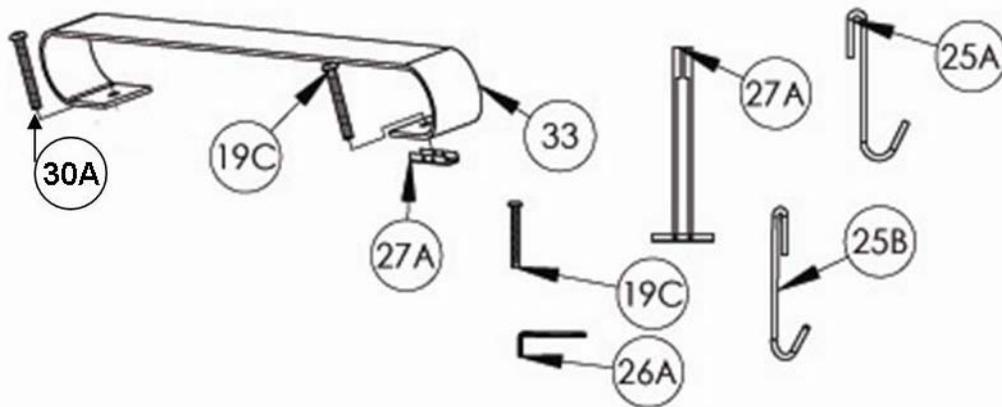

Item No.		Qty.
33	Utensil Bar	1
<b>Installation Hardware</b>		
19C	Button head screw - 2"	2
25A	Pot hook straight	4
25B	Pot hook angled	4
26A	Hex wrench	1
27A	Toggle	2
30A	Wood Screws	2

**TIP! SAVE TIME AND HASSLE.  
PLEASE READ ENTIRE INSTRUCTIONS  
BEFORE BEGINNING ASSEMBLY.**

MISSING A PART?  
Please call our TOLL FREE  
SERVICE CENTER  
1 (877) 362-5863

**Rack It Up!**<sup>™</sup>

## Paintable:

Want a different color? The finish on this pot rack can be spray painted any color. We recommend Rustoleum "Hammered" colors for their metal-like finishes, however any quality spray-can paint may be used. See a paint retailer for guidance.

## Tools Needed:

Provided: Installation wall anchors, bolts and hex wrench.

You will need: level, tape measure, pencil, drill and 1/8" drill bit, hammer and nail

## STEP 1: Location

Decide where you want to place your utensil bar. Consider the height of the wall where the bar will hang, keeping in mind how far below the bar your pot and utensils will hang.

On the wall (use a level to ensure that the bar is horizontal) mark the two points where the bar will attach. Then tap a small nail through each mark to be certain a stud is not in the way. (NOTE: because your utensil bar includes toggle anchors that can hold 100s of pounds, you DO NOT need to locate and bolt to studs.)

## STEP 2: INSTALL DRYWALL ANCHORS

*RACK IT UP!*'s drywall togglers eliminate the need to bolt your pot rack to a stud. The steel anchors are very strong and when installed in drywall each drywall anchor holds about 200 lbs. Two anchors hold about 400 lbs., many times the weight you will likely hang from your pot rack. **See Back of this Booklet for Toggle Instructions.**

## INSTALL IN WOOD

If you need to install one or both sides of your rack in wood, use as many of the four wall screws (30A) included, but without a red sleeve. See back page of booklet under Step 1.

## CLEANING

Your bar has a durable powder coat finish designed to provide years of protection. Cleaning is done easily using soap and a damp cloth. Dry thoroughly after cleaning.

---

## ACCESSORIES

### 8 Pot Hooks

There's always a need for extra hooks. Set of eight hooks (4 straight, 4 angle). Steel with powder coat finish for extra durability.



**RACK IT UP by Enclume**  
Enclume Design Products, Inc.  
24 Colwell Street, Port Hadlock WA 98339  
TOLL FREE (877) 362-5863

[customerservice@enclume.com](mailto:customerservice@enclume.com) [www.enclume.com](http://www.enclume.com)

RACK IT UP by Enclume™ is a trademark of Enclume Design Products, Inc. All rights reserved. Made in China. Packed in the U.S.A.

©2008 Enclume Design Products, Inc.

# Installation of Drywall Anchors

## TOGGLER® brand SNAPTOGGLE® Toggle Bolt Installation Instructions

**IMPORTANT!** If your house is older (maybe a Victorian?) with lath board plaster ceilings and walls, DO NOT use the new dry-wall anchor system. Old lath board plaster walls are not strong enough to hold drywall anchors. In this case, you must attach the wall rack to wood studs with wood lag screws (not included with your rack).

- 1) Using an electric drill with 1/2" bit, drill a hole at each of your marked points. Hold metal channel flat alongside plastic straps and slide channel through hold. Minimum clearance behind wall should be 1 7/8".


*NOTE: If a wood stud happens to be located at one or both of those points, we recommend that you use 3/16" x 1 1/2" wood Screws to attach to the stud. (Pre-drill a 1/8" hole in the stud so the screws are easier to insert into the hole.)*

- 2) Hold ends of straps between thumb and forefinger and pull toward you until channel rests flush behind wall. Slide Plastic cap along straps with other hand until flange of cap is flush with the wall.

- 3) Bend straps at wall by pushing side to side, snapping off straps level with flange of cap.

- 4) Repeat for other anchor point.

- 5) Now position Utensil Bar on the wall lining up holes with holes in wall. With your fingers, screw button head bolt (19C) through each hole and into anchor until nearly to wall. Then with hex wrench provided, tighten both bolts snugly.

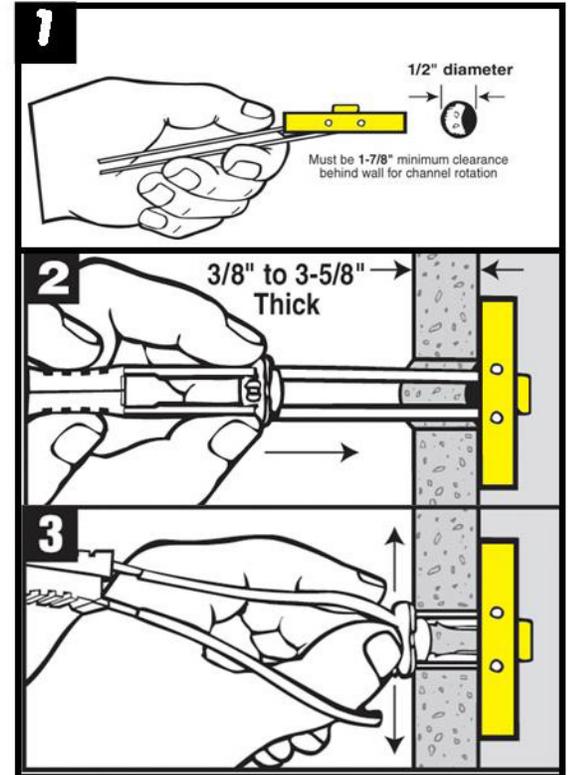

### **Toggler® Independent Lab Results** (anchor load before failure per attachment point)

#### **TENSILE**

1/2" drywall – 265 lbs.  
5/8" drywall – 356 lbs.

#### **SHEAR**

1/2" drywall – 241 lbs.  
5/8" drywall – 324 lbs.

Industry safety standards recommend 1/4 of ultimate test load.

That's It! You are now ready to hang hooks, pots and utensils!