


TIRE APPLICATION GUIDE



How to read your tire size:

Tire size must be known in order to select a traction product. On most tires the size will look like this:

P225/75R16. This example indicates that the tire is 225mm wide, has an aspect ratio of 75% and is mounted on a wheel that is 16 inches in diameter. All of these numbers are critical in helping to find the correct traction product. The letter "P" (for passenger), "LT" (for light truck) and "R" (for radial) that sometimes appear with these numbers are much less important.

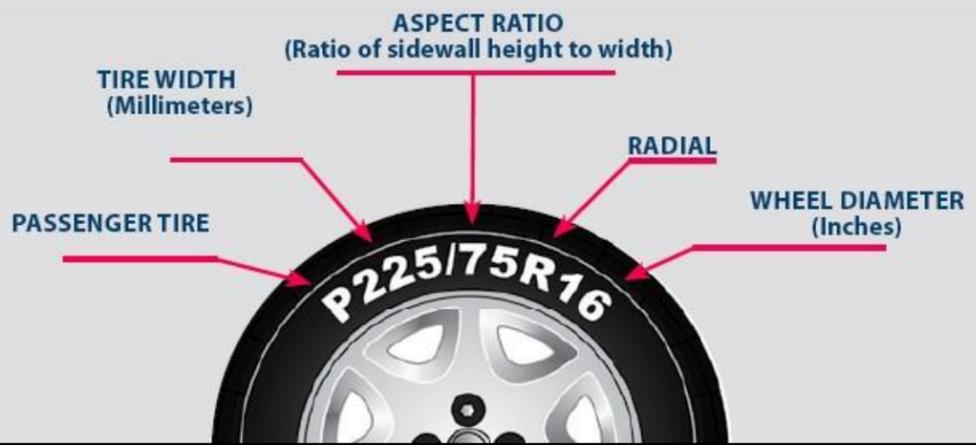

Commercial and Heavy Duty applications

The heavy duty product applications show the best choices for most tires. Truck tires can vary in size due to tire manufacturers, tread design or recapping. It is strongly recommended that traction products be fitted to the tire before actual use. Chain laws can vary from state to state. Product stock number shown in **RED BOLD** will meet or exceed S.A.E. Class "S" clearance requirement. Super Z8 recommended for commercial vehicles under 20,000 GVW.

* Indicates tire chain that is available in both CAM and non-CAM version.

	Tire size	Axle Type	Super Z	Super Z8	Alloy Radial	Quik Grip SQ Rod Alloy	Diamond Blue Alloy	Quik Grip Link Style	Quik Grip V-Bar	Quik Grip V-Bar CTO
6.5	6.50-16C	Single	-	-	-	-	-	QG2219*	QG2819*	-
		Dual	-	-	-	-	-	QG4219*	QG4819	-
7	7.00-20	Single	-	SZ497	-	-	-	QG2214*	QG2814	-
	7-22.5	Single	ZT751	-	-	-	-	QG2214*	QG2814	QGV320
7.2	7.2-24	Single	-	-	-	-	-	QG0832	-	-
7.5	7.50-20	Single	-	-	-	-	-	QG2237	QG2837	-
		Dual	ZT956	-	-	-	-	-	QG4837	-
	7.50-22.5	Single	ZT865	-	-	-	-	QG2239CAM*	QG2839*	-
		Dual	ZT962	-	-	-	-	QG4239CAM*	QG4839	-
8	8-17.5	Single	ZT735	-	-	-	-	QG2219*	QG2819*	QGV315
		Dual	-	-	-	-	-	QG4219*	QG4819	-
	8-22.5	Single	-	-	-	-	-	QG2237	QG2837	-
		Dual	ZT956	-	-	-	-	-	QG4837	-
8.25	8.25-15TR	Single	ZT835	SZ462	-	QG2128	-	QG2228*	QG2828	-
		Dual	-	-	-	-	-	QG4228CAM	QG4828	-
	8.25-20	Single	ZT859	SZ492	TA1939	-	-	QG2239CAM*	QG2839*	-
		Dual	ZT962	-	TA3939	-	-	QG4239CAM*	QG4839	-
	8.25-22.5	Single	ZT865	-	-	-	-	QG2239CAM*	QG2839*	-
		Dual	ZT962	-	-	-	-	QG4239CAM*	QG4839	-
8.3	8.3-24	Single	-	-	-	-	-	QG0822	-	-
9	9.00-15TR	Single	ZT837	SZ468	-	-	-	-	-	-
		Dual	ZT948	-	-	-	-	-	-	-
	9.00-20	Single	ZT869	-	TA1941	-	DB2141	QG2241CAM*	QG2841*	-
		Dual	ZT970	-	TA3941	-	-	QG4241CAM*	QG4841	-
	9-22.5	Single	ZT859	SZ492	TA1939	-	-	QG2239CAM*	QG2839*	-
		Dual	ZT962	-	TA3939	-	-	QG4239CAM*	QG4839	-
9.5	9.5-24	Single	-	-	-	-	-	QG0832	-	-
	9.5-28	Single	-	-	-	-	-	QG0836	-	-
	9.5-32	Single	-	-	-	-	-	QG0838	-	-
	9.5-38	Single	-	-	-	-	-	QG0862	-	-
	9.5-42	Single	-	-	-	-	-	QG0862	-	-
10	10.00-15TR	Single	ZT853	SZ486	-	-	-	-	-	-
		Dual	ZT956	-	-	-	-	-	-	-
	10.00-20	Single	ZT881	-	TA1945	QG2145	DB2145	QG2245CAM*	QG2845*	QGV343HD*
		Dual	ZT982	-	TA3945	QG4145	-	QG4245CAM*	QG4845*	QGV3743HD*
	10.00-22	Single	ZT887	-	TA1949	QG2149	DB2149	QG2249CAM*	QG2849*	QGV344HD*
		Dual	ZT990	-	TA3949	QG4149	-	QG4249CAM*	QG4849*	QGV3744HD*
	10-22.5	Single	ZT869	-	TA1941	-	DB2141	QG2241CAM*	QG2841*	-
		Dual	ZT970	-	TA3941	-	-	QG4241CAM*	QG4841	-
10.00/90-20	Single	ZT877	-	-	QG2145	DB2145	QG2245CAM*	QG2845*	-	
	Dual	ZT970	-	-	QG4145	-	QG4245CAM*	QG4845*	-	
11	11.00-20	Single	ZT887	-	TA1951	QG2151	DB2151	QG2251CAM*	QG2851*	QGV355
		Dual	ZT990	-	TA3949	-	-	-	QG4851	QGV755
	11.00-22	Single	ZT891	-	-	QG2155	-	QG2255CAM*	QG2855*	QGV356
		Dual	-	-	-	-	-	-	QG4855	QGV756
	11-22.5	Single	ZT881	-	TA1945	QG2145	DB2145	QG2245CAM*	QG2845*	QGV343HD*
		Dual	ZT982	-	TA3945	QG4145	-	QG4245CAM*	QG4845*	QGV3743HD*
11.00-24	Single	ZT891	-	-	-	-	-	QG2853	-	



Commercial and Heavy Duty applications

RED BOLD will meet or exceed S.A.E. Class "S" clearance requirement.

* Indicates tire chain that is available in both CAM and non-CAM version.

	Tire size	Axle Type	Super Z	Super Z8	Alloy Radial	Quik Grip SQ Rod Alloy	Diamond Blue Alloy	Quik Grip Link Style	Quik Grip V-Bar	Quik Grip V-Bar CTO
11	11-24.5	Single	ZT887	-	TA1949	QG2149	DB2149	QG2249CAM*	QG2849*	QGVC344HD*
		Dual	ZT990	-	TA3949	QG4149	-	QG4249CAM*	QG4849*	QGVC744HD*
11.2	11.2-24	Single	ZT887	-	-	-	-	QG0836	-	-
	11.2-30	Single	-	-	-	-	-	QG0838	-	-
	11.2-32	Single	-	-	-	-	-	QG0856	-	-
	11.2-38	Single	-	-	-	-	-	QG0862	-	-
11.5	11.50-20	Single	ZT887	-	TA1951	QG2151	DB2151	QG2251CAM*	QG2851*	QGV355
		Dual	ZT990	-	TA3949	-	-	-	QG4851	QGV755
	11.5-22.5	Single	ZT881	-	TA1947	-	-	QG2235	-	QGVC344HD*
		Dual	-	-	TA3947	-	-	-	-	QGVC744HD*
12	12.00-20	Single	ZT891	-	-	QG2155	-	QG2255CAM*	QG2855*	QGV356
		Dual	-	-	-	-	-	-	QG4855	QGV756
	12-22.5	Single	ZT887	-	TA1951	QG2151	DB2151	QG2251CAM*	QG2851*	QGV355
		Dual	ZT990	-	TA3949	-	-	-	QG4851	QGV755
	12.00-24	Single	-	-	-	-	-	QG2257	QG2857	-
	12-24.5	Single	-	-	-	QG2155	-	QG2255CAM*	QG2855*	QGV356
	Dual	-	-	-	-	-	-	QG4855	QGV756	
12.2	12.2-24	Single	-	-	-	-	-	QG0852	-	-
12.4	12.4-16	Single	-	-	-	-	-	QG0850	-	-
	12.4-24	Single	-	-	-	-	-	QG0852	-	-
	12.4-28	Single	-	-	-	-	-	QG0856	-	-
	12.4-32	Single	ZT-132	-	-	-	-	QG2615	-	-
	12.4-38	Single	-	-	-	-	-	QG0862	-	-
	12.4-42	Single	-	-	-	-	-	QG0866	-	-
12.5	12.5-22.5	Single	ZT887	-	TA1951	QG2151	DB2151	QG2251CAM*	QG2851*	QGV355
		Dual	ZT990	-	TA3949	-	-	-	QG4851	QGV755
	12.5-24.5	Single	ZT891	-	-	QG2155	-	QG2255CAM*	QG2855*	-
		Dual	-	-	-	-	-	-	QG4855	-
	12.5/80-18	Single	-	-	-	-	-	QG0834	-	-
12.75	12.75-22.5	Single	ZT891	-	TA1949	QG2155	-	QG2255CAM*	QG2855*	-
		Dual	ZT990	-	TA3949	-	-	-	QG4855	-
13	13-22.5	Single	ZT891	-	-	-	-	-	-	-
	13.00-24	Single	-	-	-	-	-	QG2612	-	-
	13.00-25	Single	-	-	-	-	-	QG2612	-	-
	13/80-20	Single	-	-	TA1945	QG2145	DB2145	QG2245CAM*	QG2845*	-
		Dual	-	-	TA3945	QG4145	-	QG4245CAM*	QG4845*	-
13.5	13.50-16.1	Single	-	-	-	-	QG0838	-	-	
13.6	13.6-16	Single	-	-	-	-	-	QG0850	-	-
	13.6-26	Single	-	-	-	-	-	QG0858	-	-
	13.6-28	Single	-	-	-	-	-	QG0859	-	-
	13.6-38	Single	-	-	-	-	-	QG0866	-	-
13.9	13.9-36	Single	-	-	-	-	QG0866	-	-	
14	14-17.5	Single	-	-	-	-	-	QG0850	-	-
	14.00-20 GRADER	Single	ZT-132	-	-	-	-	QG2612	-	-
	14.00-21	Single	-	-	-	-	-	QG2612	-	-
	14.00-24 GRADER	Single	ZT-132	-	-	-	-	QG2615	-	-
	14.00-25	Single	-	-	-	-	-	QG2615	-	-
	14/80-20	Single	ZT892	-	-	QG2155	-	QG2255CAM*	QG2855*	-
	Dual	-	-	-	-	-	-	QG4855	-	
14.9	14.9-24	Single	-	-	-	-	-	QG0859	-	-
	14.9-26	Single	ZT-132	-	-	-	-	QG2615	-	-
	14.9-28	Single	-	-	-	-	-	QG0869	-	-
	14.9-30	Single	-	-	-	-	-	QG0876	-	-
15	15-22.5	Single	-	-	-	-	QG3255	-	-	
15.5	15.5-25	Single	ZT-132	-	-	-	-	QG2612	-	-
16	16.00-20 GRADER	Single	ZT-141	-	-	-	-	QG2624	-	-
	16.00-21 GRADER	Single	ZT-141	-	-	-	-	QG2624	-	-
	16.00-24 GRADER	Single	ZT-143	-	-	-	-	QG2627	-	-
	16.00-25 GRADER	Single	ZT-143	-	-	-	-	QG2627	-	-
16.5	16.5-19.5	Single	-	-	-	-	-	QG3255	-	-
	16.5-22.5	Single	ZT896	-	TA2071	-	-	-	-	-
16.9	16.9-20	Single	-	-	-	-	-	QG2612	-	-
	16.9-24	Single	-	-	-	-	-	QG0874	-	-
	16.9-28	Single	-	-	-	-	-	QG0876	-	-
	16.9-30	Single	-	-	-	-	-	QG0877	-	-
	16.9-34	Single	-	-	-	-	-	QG0879	-	-



Commercial and Heavy Duty applications

RED BOLD will meet or exceed S.A.E. Class "S" clearance requirement.

* Indicates tire chain that is available in both CAM and non-CAM version.

	Tire size	Axle Type	Super Z	Super Z8	Alloy Radial	Quik Grip SQ Rod Alloy	Diamond Blue Alloy	Quik Grip Link Style	Quik Grip V-Bar	Quik Grip V-Bar CTO	
16.9	16.9-38	Single	-	-	-	-	-	QG0880	-	-	
17.5	17.5L-24	Single	-	-	-	-	-	QG0874	-	-	
	17.5-25	Single	-	-	-	-	-	QG2624	-	-	
18	18.00-24	Single	-	-	-	-	-	QG2636	-	-	
	18.00-25	Single	ZT-145	-	-	-	-	QG2636	-	-	
	18.00-26	Single	-	-	-	-	-	QG2636	-	-	
18.4	18.4-16.1	Single	-	-	-	-	-	QG0881	-	-	
	18.4-26	Single	-	-	-	-	-	QG0883	-	-	
	18.4-30	Single	-	-	-	-	-	QG0885	-	-	
	18.4-34	Single	-	-	-	-	-	QG0887	-	-	
	18.4-38	Single	-	-	-	-	-	QG0889	-	-	
19	19-22.5	Single	-	-	-	-	-	QG3261	-	-	
19.5	19.5-19.5	Single	-	-	-	-	-	QG3261	-	-	
	19.5L-24	Single	-	-	-	-	-	QG0883	-	-	
20	20.5-25	Single	-	-	-	-	-	QG2633	-	-	
21	21L-24	Single	-	-	-	-	-	QG2648	-	-	
	21.00-25	Single	-	-	-	-	-	QG2648	-	-	
21.5	21.5-16	Single	-	-	-	-	-	QG0882	-	-	
	21.5L-16.1	Single	-	-	-	-	-	QG0882	-	-	
23.1	23.1-26	Single	-	-	-	-	-	QG0891	-	-	
	23.1-30	Single	-	-	-	-	-	QG0893	-	-	
23.5	23.5-25	Single	-	-	-	-	-	QG2645	-	-	
37	37x12.50-17	Single	ZT859	SZ492	-	-	-	QG3235	-	-	
	37x12.50-20LT	Single	ZT859	SZ492	-	-	-	QG3235	-	-	
38	38x14.50-17	Single	ZT881	-	-	-	-	QG3235	-	-	
	38x15-15	Single	ZT881	-	-	-	-	QG3235	-	-	
	38x10.50-15	Single	ZT859	SZ492	-	-	-	QG2239CAM*	QG2839*	-	
215	215/75-17.5	Single	ZT729	-	-	QG2121	-	QG2221*	QG2821*	QGV315	
		Dual	-	-	-	-	QG4221*	QG4821*	-		
	215/75-19.5	Single	ZT747	-	-	QG2128	-	QG2228*	QG2828*	QGV320	
		Dual	-	-	-	-	QG4228CAM	QG4828	-		
225	225/70-19.5	Single	ZT741	-	-	QG2121	-	QG2221*	QG2821*	QGV320	
		Dual	-	-	-	-	QG4221*	QG4821*	-		
	225/70-22.5	Single	-	SZ497	-	-	-	QG2214*	QG2814	-	
		Single	ZT735	-	-	QG2121	-	QG2221*	QG2821*	QGV315	
	225/75-19.5	Dual	-	-	-	-	-	QG4221*	QG4821*	-	
		Single	ZT747	-	-	QG2128	-	QG2228*	QG2828*	QGV320	
		Dual	-	-	-	-	-	QG4228CAM	QG4828	-	
		Single	-	-	-	-	-	QG2237	QG2837	-	
235	235/70-17.5	Single	ZT735	-	-	QG2121	-	QG2221*	QG2821*	QGV320	
		Dual	-	-	-	-	QG4221*	QG4821*	-		
	235/70-19.5	Single	ZT741	-	-	QG2121	-	QG2221*	QG2821*	QGV320	
		Dual	-	-	-	-	QG4221*	QG4821	-		
	235/75-17.5	Single	ZT741	-	-	QG2128	-	QG2228	QG2828*	QGV320	
		Dual	-	-	-	-	QG4228CAM	QG4828	-		
	235/80-22.5	Single	ZT859	SZ492	TA1939	-	-	QG2239CAM*	QG2839	-	
		Dual	ZT956	-	TA3939	-	-	QG4239CAM*	QG4839	-	
245	245/70-17.5	Single	ZT741	-	-	QG2128	-	QG2228*	QG2828*	QGV320	
		Dual	-	-	-	-	QG4228CAM	QG4828	-		
	245/70-19.5	Single	ZT835	SZ462	-	QG2128	-	QG2228*	QG2828*	-	
		Dual	-	-	-	-	QG4228CAM	QG4828	-		
	245/70-22.5	Single	ZT853	SZ486	-	-	-	QG2237	QG2837	-	
		Dual	-	-	-	-	-	-	QG4837	-	
	245/75-17.5	Single	ZT741	-	-	QG2128	-	QG2228*	QG2828*	QGV320	
		Dual	-	-	-	-	-	QG4228CAM	QG4828	-	
		245/75-19.5	Single	ZT835	SZ462	-	QG2128	-	QG2228*	QG2828*	-
			Dual	-	-	-	-	QG4228CAM	QG4828	-	
	245/75-22.5	Single	ZT859	SZ492	-	-	-	QG2239CAM*	QG2839*	-	
		Dual	ZT956	-	-	-	-	QG4239CAM*	QG4839	-	
		245/80-22.5	Single	ZT859	SZ492	TA1939	-	-	QG2239CAM*	QG2839*	-
			Dual	ZT956	-	TA3939	-	-	QG4239CAM*	QG4839	-
255	255/60-22.5	Single	ZT837	SZ468	-	-	-	QG2237	QG2837	-	
		Dual	-	-	-	-	-	QG4837	-		
	255/70-19.5	Single	ZT835	SZ462	-	QG2128	-	QG2228*	QG2828*	-	



Commercial and Heavy Duty applications

RED BOLD will meet or exceed S.A.E. Class "S" clearance requirement.

* Indicates tire chain that is available in both CAM and non-CAM version.

	Tire size	Axle Type	Super Z	Super Z8	Alloy Radial	Quik Grip SQ Rod Alloy	Diamond Blue Alloy	Quik Grip Link Style	Quik Grip V-Bar	Quik Grip V-Bar CTO
255		Dual	-	-	-	-	-	QG4228CAM	QG4828	-
	255/70-22.5	Single	ZT859	SZ497	TA1939	-	-	QG2239CAM*	QG2839*	-
		Dual	ZT956	-	TA3939	-	-	QG4239CAM*	QG4839	-
	255/75-22.5	Single	ZT859	SZ492	TA1939	-	-	QG2239CAM*	QG2839*	-
		Dual	ZT956	-	TA3939	-	-	QG4239CAM*	QG4839	-
	255/80-22.5	Single	ZT865	-	-	-	-	QG2239CAM*	QG2839*	-
265		Dual	ZT962	-	-	-	-	QG4239CAM*	QG4839	-
	265/70-19.5	Single	ZT837	SZ468	-	-	-	QG2237	QG2837	-
		Dual	-	-	-	-	-	-	QG4837	-
	265/70-22.5	Single	ZT869	-	-	-	-	QG2239CAM*	QG2839*	-
		Dual	ZT956	-	-	-	-	QG4239CAM*	QG4839	-
	265/75-19.5	Single	ZT837	SZ497	-	-	-	QG2237	QG2837	-
275		Dual	ZT948	-	-	-	-	-	QG4837	-
	265/75-22.5	Single	ZT865	-	-	-	-	QG2239CAM*	QG2839*	-
		Dual	ZT962	-	-	-	-	QG4239CAM*	QG4839	-
	275/70-19.5	Single	ZT837	SZ497	-	-	-	QG2237	QG2837	-
		Dual	ZT948	-	-	-	-	-	QG4837	-
	275/70-22.5	Single	ZT869	-	-	-	-	QG2239CAM*	QG2839*	-
		Dual	ZT956	-	-	-	-	QG4239CAM*	QG4839	-
	275/75-22.5	Single	ZT877	-	TA1943	QG2143	DB2143	QG2243CAM*	QG2843CAM	QGVC343HD*
285		Dual	ZT962	-	TA3943	QG4143	-	QG4243CAM*	QG4843CAM	QGVC743HD*
	275/80-22.5	Single	ZT881	-	TA1943	QG2143	DB2143	QG2243CAM*	QG2843CAM	QGVC343HD*
		Dual	ZT970	-	TA3943	QG4143	-	QG4243CAM*	QG4843CAM	QGVC743HD*
	275/80-24.5	Single	ZT881	-	TA1947	QG2147	DB2147	QG2247CAM*	QG2847CAM	QGVC344HD*
		Dual	ZT982	-	TA3947	QG4147	-	QG4247CAM*	QG4847CAM	QGVC744HD*
	285/65-22.5	Single	ZT869	-	-	-	-	QG2239CAM*	QG2839*	-
		Dual	ZT956	-	-	-	-	QG4239CAM*	QG4839	-
	285/70-19.5	Single	ZT853	SZ486	-	-	-	QG2234CAM	-	-
295		Dual	ZT948	-	-	-	-	-	-	-
	285/70-24.5	Single	ZT881	-	TA1943	QG2145	DB2145	QG2245CAM*	QG2845*	-
		Dual	ZT970	-	TA3943	QG4145	-	QG4245CAM*	QG4845*	-
	285/75-22.5	Single	ZT877	-	TA1943	QG2143	DB2143	QG2243CAM*	QG2843CAM	QGVC343HD*
		Dual	ZT962	-	TA3943	QG4143	-	QG4243CAM*	QG4843CAM	QGVC743HD*
	285/75-24.5	Single	ZT881	-	TA1947	QG2147	DB2147	QG2247CAM*	QG2847CAM	QGVC344HD*
		Dual	ZT982	-	TA3947	QG4147	-	QG4247CAM*	QG4847CAM	QGVC744HD*
	285/80-22.5	Single	ZT881	-	TA1951	QG2151	DB2151	QG2251CAM*	QG2851*	-
		Dual	ZT982	-	-	-	-	-	QG4851	-
	285/80-24.5	Single	ZT881	-	TA1951	QG2151	DB2151	QG2251CAM*	QG2851*	-
305		Dual	ZT982	-	TA3949	-	-	-	QG4851	-
	295/60-22.5	Single	ZT859	-	-	-	-	-	-	-
		Dual	-	-	-	-	-	-	-	-
	295/70-19.5	Single	ZT853	SZ497	-	-	-	-	-	-
		Dual	-	-	-	-	-	-	-	-
	295/70-22.5	Single	ZT877	-	TA1943	QG2143	DB2143	QG2243CAM*	QG2843CAM	QGVC343HD*
		Dual	-	-	TA3943	QG4143	-	QG4243CAM*	QG4843CAM	QGVC743HD*
	295/75-17.5	Single	ZT859	SZ492	-	-	-	QG2226	-	-
		Dual	-	-	-	-	-	-	-	-
	295/75-22.5	Single	ZT881	-	TA1943	QG2143	DB2143	QG2243CAM*	QG2843CAM	-
315		Dual	ZT970	-	TA3943	QG4143	-	QG4243CAM*	QG4843CAM	-
	295/75-24.5	Single	ZT881	-	TA1947	-	-	QG2235	-	QGVC344HD*
		Dual	ZT982	-	TA3947	-	-	-	-	QGVC744HD*
	295/80-22.5	Single	ZT881	-	TA1951	QG2151	DB2151	QG2251CAM*	QG2851*	-
		Dual	ZT982	-	-	-	-	-	QG4851	-
	305/70-22.5	Single	ZT881	-	-	QG2145	DB2145	-	-	-
320		Dual	-	-	-	QG4145	-	-	-	-
	305/75-24.5	Single	ZT887	-	-	QG2155	DB2151	QG2255CAM*	QG2855*	-
		Dual	ZT982	-	-	-	-	-	QG4855	-
	305/80-22.5	Single	ZT881	-	TA1947	QG2151	DB2151	QG2251CAM*	QG2851*	-
		Dual	ZT982	-	TA3947	-	-	-	QG4851	-
	305/85-22.5	Single	ZT892	-	-	QG2155	-	QG2255CAM*	QG2855*	QGV355
315		Dual	ZT990	-	-	-	-	-	QG4855	QGV755
	315/70-22.5	Single	ZT881	-	TA1945	QG2145	DB2145	-	-	QGVC343HD*
		Dual	ZT970	-	TA3945	QG4145	-	-	-	QGVC743HD*
	315/80-22.5	Single	ZT887	-	TA1949	QG2155	DB2151	QG2255CAM*	QG2855*	-
		Dual	ZT990	-	TA3949	-	-	-	QG4855	-
315	315/80-22.5 MICHELIN	Single	ZT891	-	TA1949	QG2155	DB2151	QG2255CAM*	QG2855*	-
		Dual	-	-	TA3949	-	-	-	QG4855	-
320	320/85-38	Single	-	-	-	-	QG0862	-	-	



Commercial and Heavy Duty applications

RED BOLD will meet or exceed S.A.E. Class "S" clearance requirement.

* Indicates tire chain that is available in both CAM and non-CAM version.

	Tire size	Axle Type	Super Z	Super Z8	Alloy Radial	Quik Grip SQ Rod Alloy	Diamond Blue Alloy	Quik Grip Link Style	Quik Grip V-Bar	Quik Grip V-Bar CTO
365	365/70-22.5	Single	ZT892	-	-	-	-	-	-	-
	365/80-20	Single	ZT892	-	-	QG2155	-	QG2255CAM*	QG2855*	-
		Dual	-	-	-	-	-	-	QG4855	-
	365/85-20	Single	-	-	-	-	-	QG3255	-	-
380	380/70-28	Single	-	-	-	-	-	QG2612	-	-
	380/80-38	Single	-	-	-	-	-	QG0879	-	-
	380/85-28	Single	-	-	-	-	-	QG0869	-	-
380	380/85-30	Single	-	-	-	-	-	QG0876	-	-
	380/85-34	Single	-	-	-	-	-	QG0877	-	-
385	385/65-22.5	Single	ZT892	-	-	-	-	QG3255	-	-
	385/95-25	Single	ZT-132	-	-	-	-	QG2615	-	-
395	395/85-20	Single	ZT898	-	-	-	-	QG3261	-	-
400	400/70-20	Single	ZT892	-	-	-	-	QG3255	-	-
420	420/70-28	Single	-	-	-	-	-	QG0869	-	-
	420/85-28	Single	-	-	-	-	-	QG0876	-	-
	420/85-34	Single	-	-	-	-	-	QG0879	-	-
	420/90-30	Single	-	-	-	-	-	QG0879	-	-
425	425/55-22.5	Single	ZT896	-	TA2071	-	-	-	-	-
	425/65-22.5	Single	ZT896	-	TA2071	-	-	-	-	-
	425/70-22.5	Single	ZT898	-	TA2071	-	-	-	-	-
440	440/80-28	Single	-	-	-	-	QG0876	-	-	
445	445/50-22.5	Single	ZT897	-	TA2069	-	-	QG3269CAM*	-	-
	445/55-22.5	Single	-	-	-	-	-	QG3255	-	-
	445/65-19.5	Single	ZT896	-	TA2071	-	-	-	-	-
	445/65-22.5	Single	ZT-118	-	-	-	-	QG3261	-	-
	445/80-22.5	Single	-	-	-	-	-	QG0874	-	-
	445/95-25	Single	ZT-143	-	-	-	-	QG2627	-	-
455	455/50-22.5	Single	ZT897	-	TA2069	-	-	QG3269CAM*	-	-
	455/55-22.5	Single	ZT899	-	TA2069	-	-	QG3269CAM*	-	-
480	480/70-28	Single	-	-	-	-	-	QG0883	-	-
	480/70-30	Single	-	-	-	-	-	QG0883	-	-
	480/80-38	Single	-	-	-	-	-	QG0889	-	-
520	520/70-34	Single	ZT-145	-	-	-	QG2636	-	-	
540	540/60-30	Single	-	-	-	-	QG2633	-	-	
550	550/65-25	Single	-	-	-	-	QG0883	-	-	