

QUICK START GUIDE

Included in this Package:

- **LaserShield® Master Alarm Unit (MAU)**
- **LaserShield® Wireless Detention Unit (WDU)**
- **2 Keychain Remotes**
- **8' foot Telephone Cord**
- **AC Power Adapters**
- **Monitoring Service Agreement**
- **Monitoring Service Information Form**
- **Owner's Manual**
- **Product Registration Card**
- **2 Emergency Wallet Cards**
- **Warning Decals**
- **Pet Shield**




1

MASTER ALARM UNIT (MAU)

PLUG & POWER

- Plug Master Alarm Unit (MAU) into power and phone
- Press ON/OFF button until the unit announces "LaserShield On"

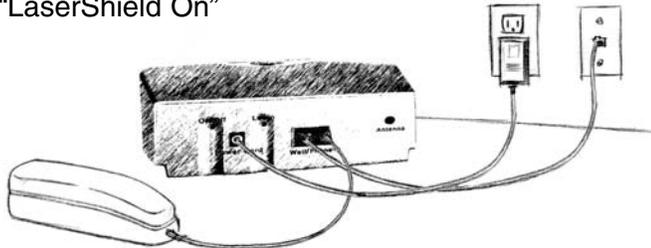

Press Button to Turn On/Off



NOTE: Do not place other electronic devices or objects on top of the MAU.


2

WIRELESS DETECTION UNIT (WDU)

PLACE, PLUG & POWER

- Place Wireless Detection Unit (WDU) to cover desired area for protection
- Plug power cord between unit and wall outlet
- Press on/off button on rear of unit

NOTE: Optimum height is 4' to 6' feet above floor.
Positioning and aiming unit from a corner delivers best protection.
Position so there are no obstructions to units view.
See LaserShield® Owner's Manual for using system with pets.

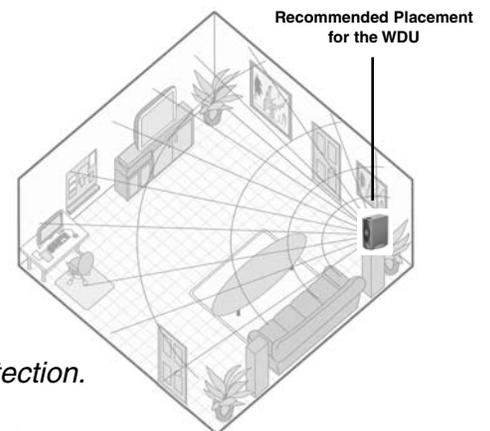

3

LEARN & LINK DEVICES

You must link your WDUs and Keychain Remotes to the MAU for the system to work:

- Press Learn button on rear of MAU
- Press Panic button on all Keychain Remotes and Wireless Detection Units*
- The MAU will announce successful linking

Press Learn Button



Press Both Buttons Together



Press Panic Button



NOTE: Pressing Panic button on MAU during Learn Mode will erase all devices.

* Wireless Detection Unit is sometimes referred to as a Satellite Unit

4

EXIT LEARN MODE

- Press Learn button on rear of MAU or wait 60 seconds
- MAU will announce all learned devices

Press Button to Exit
Learn Mode



NOTE: Be certain all devices are acknowledged by the MAU.

5

ACTIVATE MONITORING AND RESPONSE

You are not fully protected until you activate monitoring

- Go to www.lasershield.net
- Click on "Activate" LaserShield®
- Prepare to enter your Device ID Number located on bottom of MAU
- Follow instructions



24/7 Monitoring

Professional Response

Immediate Notification

NON-INTERNET USERS

www.lasershield.net

- Fax or mail Activation Forms (included in box) to LaserShield® Customer Care
- Wait for LaserShield® Customer Care to contact you to request you to test the system and confirm activation

NOTE: You may use the alarm without response while waiting for Monitoring Service Activation. Internet registration is immediate. Notification and response is an important precaution against walking in on an intruder.

6

TEST SYSTEM

- Press a Panic button
- Allow siren to ring for 10 seconds
- Disarm system with Keychain Remote and wait for a phone call from LaserShield®
- Prepare to enter your Passcode using telephone touch pad to complete the Activation process.

Press Panic Button to Test



Press Button to Disarm



NOTE: Your Passcode is located on the Emergency Wallet Cards included with your LaserShield® System.

7

ARMING AND DISARMING

- Before leaving, press Arm button on your Keychain Remote
- Exit within 60 seconds
- When returning, press Disarm on Keychain Remote



NOTE: When returning, the alarm will beep 20 seconds to remind you to Disarm

8

ARMING AT NIGHT

- If you have a Wireless Detection Unit for your bedroom, press the Bypass button
- Arm your system
- System will ask you to press Arm a second time during Bypass arming

Press Button to Bypass



NOTE: Remember to press Bypass button to reactivate unit before leaving.
MAU will always announce any bypassed unit during arming.
Wireless Detection Unit Panic buttons still work during Bypass mode.

CONTACT INFORMATION

Please contact LaserShield® Customer Care at 1-866-618-4336 if you have any questions.

LaserShield® Security Systems, Inc.

LaserShield Customer Care,
c/o Accent,
645 Park East Boulevard,
New Albany, IN 47150

Visit us on the Internet:
www.lasershield.net