

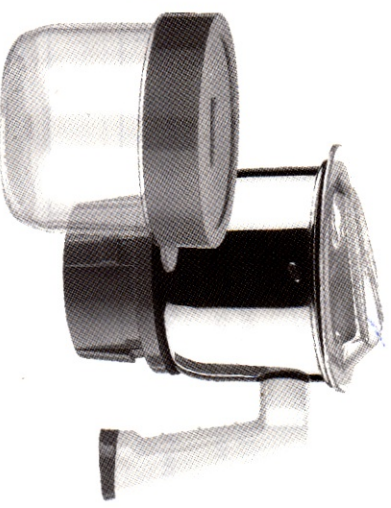


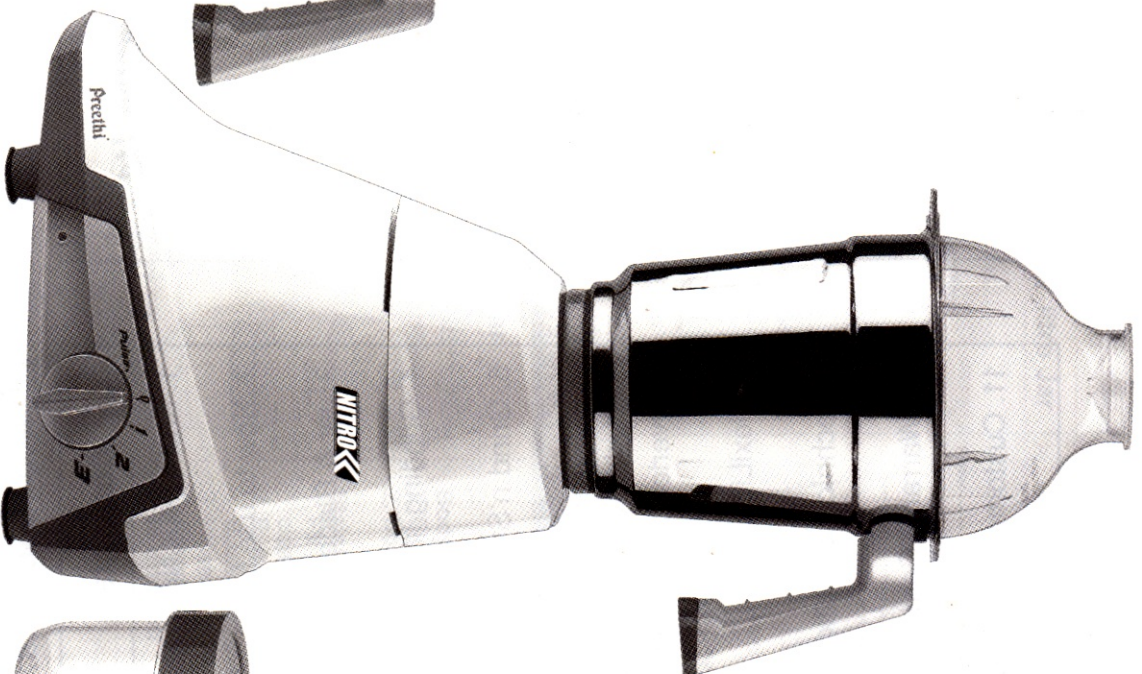

110 VOLTS
UL recognized Motor
FILE NO.: E233031

Extended Bush Life
Long Life Couplers
Flexilid

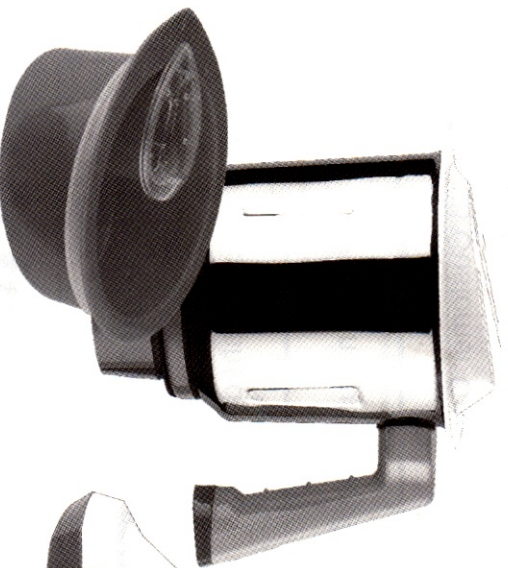

550 Watt
Stainless Steel Jars
Grind n' Store

One Year Warranty

Instruction Manual & Warranty Card

Preethi®

Range of Home Appliances

- ✱ Established in 1978
- ✱ 9 Million Customers
- ✱ 86 Customer Care Centres
- ✱ 400 Authorised Service Centres
- ✱ Over 9000 Dealers
- ✱ Exports to U.S.A, Middle East, Far East, Singapore and Sri Lanka

'That's My Guarantee'



With effect from 21.03.2013 our corporate office is shifted to:
Preethi Kitchen Appliances Pvt. Ltd.
 Futura Tech Park, 04, 4th Floor, Block B,
 #334, OMR, Sholinganallur, Chennai - 600119.
 Ph : 044-24501042 / 24501044 / 24501045

No. 1
 Grinder Brand

Grinders

Wet Grinders

Auto Cookers / Warmers

Induction Cook Tops

Electric Kettles

Coffee Makers

Irons

Preethi Kitchen Appliances Pvt. Ltd.

Survey No. 112, Natham Ekattur Road, Off IT Highway Thalambur Village, Kancheepuram Dt - 603103. INDIA.,
 Telephone: 91-44-2743 5304. Fax: 91-44-2496 0349. email: info@preethi.in, Website: www.preethi.in

Customer Care: 044 - 2432 8822

MADE IN INDIA

471000846-B

Preethi[®]

Preethi Kitchen Appliances Pvt. Ltd.

Established in 1978

9 Million Customers

86 Customer Care Centres

400 Authorised Service Centres






Over 9000 Dealers

Exports to Middle East,
Far East, Singapore
and Sri Lanka

Table of contents:

Contents	Page No
1. Know Your Nitro	3
2. How to use Nitro	4
3. Jar & Blade usage	4
4. Grinding Instructions	5
5. Grind n'Store	6
6. Do's and Don't	7
7. Overload Protector	7
8. FlexiLid	7
9. Technical Specifications	8
10. Warranty Card	9-10
11. Customer Care Centres	11



Know Your Nitro

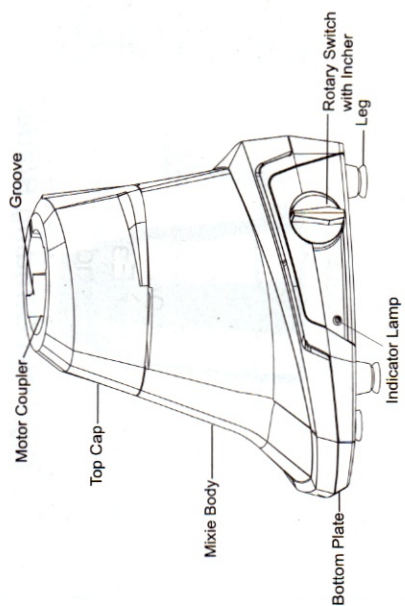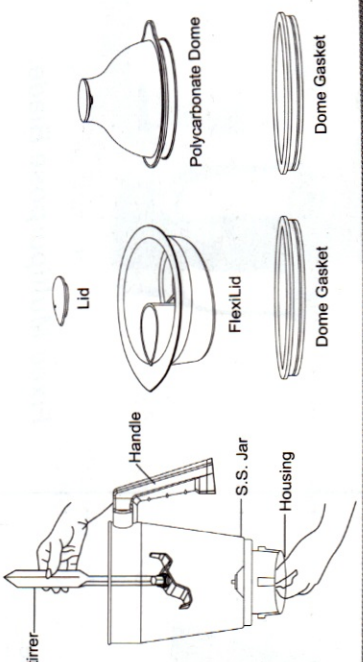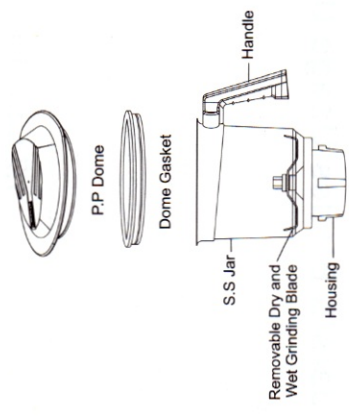
Basic Unit	Blades for 1.7 litre Jar	1.7 Litre Jar
 Motor Coupler Top Cap Mixie Body Bottom Plate Rotary Switch with Incher Leg Indicator Lamp Groove	 Blade Knob Dry & Wet Grinding Blade Mincer / Grater Blade	 Stirrer Handle S.S. Jar Housing Lid FlexiLid Dome Gasket Polycarbonate Dome Dome Gasket Hold Jar Coupler and fix required Blade onto the Spindle by gently screwing down in an anti-clockwise direction with the Spanner provided on the Stirrer, until it is firm. DO NOT OVER TIGHTEN.
1.0 Litre Jar	0.4 Litre Chutney Jar	CLEANING YOUR MIXIE
 P.P Dome Dome Gasket S.S Jar Removable Dry and Wet Grinding Blade Handle Housing	 Lid Gasket Bottle C.G Lid Gasket S.S Jar Handle Fixed Multipurpose Blade Housing	Body and Top Cap 1. Clean Body and Top Cap with a damp cloth and wipe dry. 2. Do not use abrasives or water for cleaning. Stainless Steel Jars and Blades 1. Fill in ½ litre of water and a teaspoon of any mild cleaning powder. 2. Run the Mixie on Speed 1 for 30 seconds, leaving the Blade fixed to the Spindle of the Stainless Steel Jar. 3. Rinse and dry. 4. Always store Jars in inverted position to allow water to drain off.
Note: JAR SEATING : Place the Jar on Top Cap, ensuring that the locks fit properly in the Grooves of the Top Cap. DOMES : Ensure that the Dome Gasket is properly fitted & Dome is properly fitted on Jar then hold Dome gently while operating. SPEED CONTROL : Turn Rotary Switch clockwise for speed 1, 2 or 3 as desired. Inching - Turn Rotary Switch anti-clockwise for a few seconds and release for momentary operation. (Inching is especially useful for wet grinding of chutneys, mincing meat, grating vegetables, crushing ice, etc.,)		

How to use your Preethi Nitro

PREETHI is provided with PVC insulated 3 Core, Flexicord with (max.) 15 A Plugtop & earthing. Plug the Power Cord to a 110 Volts ~ 60 Hz supply only.

Jars & Blades Usage Description

Dry & Wet Grinding Blade	Mincer / Grater Blade	Whipper Blade
		

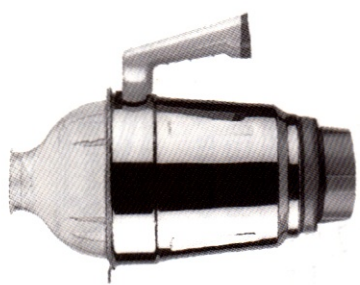1.7 Litre Jar	1.0 Litre Jar	Chutney Jar
 Dry / Wet Grinding Blade: Dry Grind, Wet Grind & Liquidise Grater / Mincer Blade: Mince Meat, Grate Vegetables & Crush Ice	 Removable Multipurpose Blade: Dry / Wet Grind, Liquidise & Crush Ice	 Fixed Multipurpose Blade: Dry / Wet Grind small quantities

GRINDING INSTRUCTIONS


ROASTED CEREALS, RAW RICE, DAL, CHILLI POWDER, GARAM MASALA, MOLAGAI PODI, DHANIYA JEERA POWDER, CURRY LEAF POWDER, COFFEE POWDER, SAMBAR / RASAM POWDER....

1. Ensure Blade, Jar, Lid and ingredients are totally dry.
2. Run on Speed 3.
3. If you need finer powder, wait for 1 minute and grind again for 1 to 2 minutes.

IDLI, DOSA, UTHAPPAM, APPAM, PESARATTU, VADAI...

1. Soak Rice/Dal for 4 to 5 hours as required.
2. Drain water from ingredients.
3. Run on Speed 3 adding water gradually through Dome Lid.
4. If Material sticks to the sides of the Jar, stop and stir using Stirrer, run again.
5. Ensure free circulation by adding enough water.
6. **Do not allow batter to get heated up.**
7. Do not add too much water, where thick paste is required.
8. **Grind twice if quantity is more.**

Note: While wet grinding tough batter, air bubbles may enter the paste. This will result in the blade rotating freely and an increase in noise. If so, stop, stir the paste and restart.



COCONUT, TOMATO, ONION, CORIANDER, MINT CHUTNEY...

1. Inch 5 to 7 times to powder ingredients.
2. Then add water as required.
3. Grind on Speed 3

MEAT MINCING, VEGETABLE GRATING, ICE CRUSHING...

1. Trim fat from meat and remove all bones.
2. Cut meat into 1" cubes.
3. Fill upto blade level only.
4. Inch 10 to 20 times or till material is minced/grated.
5. Repeat if quantity is more.

Note :

1. Use the Mincer Blade for mincing operation only.
2. Operate in 'Pulse' mode only when using the Mincer Blade.



LASSI, EGG WHIPPING, BUTTER CHURNING...

1. The Whipper Blade can be used only for whipping / churning.
2. For whipping/churning run on Speed 1 only.

"Caution : If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard"

Note: This appliance is not intended for use by persons (Including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children should be supervised to ensure that they do not play with the appliance.



Do's

1. When operating the Mixie for the first time or after long storage or when the Mixie has been shifted over a long distance, rotate the Motor Shaft by hand through the Motor Coupler, until the Motor Shaft rotates freely.
2. Unplug from power source before fixing, removing attachments and also while cleaning or when not in use.
3. **Ensure that the locks of the Stainless Steel Jar are properly seated in the grooves provided inside the Top Cap.**

Don'ts

1. Do not touch moving parts, while operating Mixie.
2. Do not overload Mixie. When hot air emanates from the openings on the Top Cap, switch off the Motor and wait for 3 minutes, before re-starting.
3. Do not add solid ingredients, when the Motor is running.
4. Do not operate with damaged Power Cord.
5. Do not tamper or attempt to repair "Preethi" Mixie.
6. Do not grind hot ingredients in the Mixie
7. **Do not use the Mincer Blade for operations other than mincing.**



Converts your 1.7 Litre Jar to 1.2 Litre Jar

HOW TO USE YOUR FLEXILID


- 1 Add the required quantity of the ingredient into the Jar.
- 2 Place the FlexiLid onto the Jar, and press till it seats firmly on the Jar (Refer figure).
- 3 Start grinding. Hold the FlexiLid firmly while grinding.

NOTE : Ensure that the gasket is fitted properly to the FlexiLid.

OVERLOAD PROTECTOR

If the Mixie stops in usage, due to operation of the Overload Protector then:

1. **FIRST SWITCH OFF THE MIXIE.**
2. Remove some material from the Jar, to reduce the load.
3. Wait for 3 minutes.
4. Lift the Unit and press the **RED KNOB** projecting out of the Bottom Plate.
5. Re-start the Mixie.

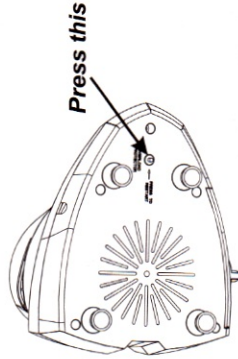



Grind n' Store

Grind & Store Chutneys, Spices, Coffee Powder...
Airtight Cap keeps contents fresh.
Refrigerate and use as Serving Bowl.

HOW TO USE YOUR GRIND N' STORE

Figure 1:

Put ingredients to be ground into Bottle.

Figure 2:

Invert Jar onto Bottle and turn in clock-wise direction, till it is properly locked.
Figure 3:

a. Seat Assembly on Top Cap ensuring that the Jar Locks fit properly in the grooves of the Top Cap.

b. Inch 5 to 10 times.

c. Grind on Speed 1 only.

d. NEVER GRIND FOR MORE THAN 1 MINUTE CONTINUOUSLY. If you need to grind for more than 1 minute, STOP MIXIE FOR 1 MINUTE & THEN GRIND AGAIN.

If the appliance is run for more than 1 minute while dry grinding, the contents will get excessively hot and can cause the Bottle to warp out of shape.

After grinding, remove Assembly from Mixie by holding the Handle, twisting anticlockwise and lifting off the Top Cap.

Figure 4: Invert Assembly, hold the Jar with one hand and twist open anti-clockwise, to release the Bottle.


Figure 5: Allow contents to cool and then twist the Cap clockwise on the Bottle to seal air-tight, ensuring that the 'O' Ring is in place.

Figure 6: The *Grind n' Store* can be used as a **Chutney Grinder** by using the **Chutney Grinder Lid** instead of the Bottle.

Caution : 1. NEVER LEAVE JAR ALONE ON MIXER.

2. NEVER OPERATE UNLESS BOTTLE IS PROPERLY LOCKED ON THE JAR.

WARNING: Improper use of appliance without locking Bottle onto Jar can cause serious injury.

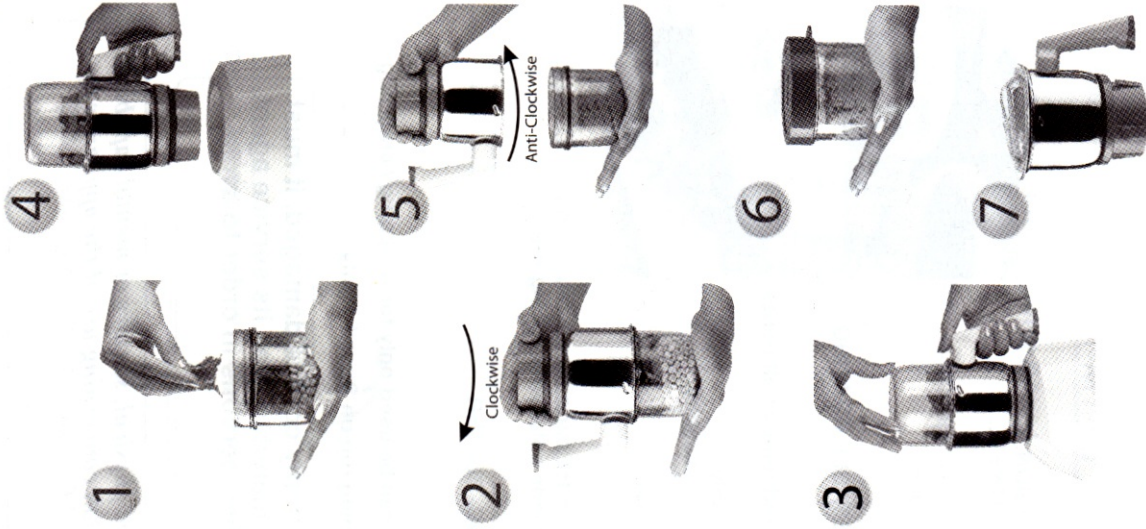



Heavy Duty Mixer Grinder - **MG 155**

One Year Warranty Card

Date Sold: Sl. No.:



1306015126

Purchaser's Name & Address:

Dealer's Name & Address:

Signature:

Stamp:

TERMS & CONDITIONS OF WARRANTY AND SERVICE POLICY

1. Retain the original sale bill and the Warranty Card, which should be shown to our Service Personnel for Scrutiny while sending your Mixie for service to our Authorised Service Centre.
2. The **One Year Warranty** does not cover damage to the Mixie due to mishandling, negligence, breakage or cracking of Polycarbonate Jars, Domes, Lids, Mixie Body and Cap and denting of Stainless Steel Jar.
3. All repairs within the **One Year Warranty** period (arising from manufacturing defects) will be done 'Free of Charge'. Our Customer Care Centres will not charge you for components or labour.
4. **Free service and replacement under Warranty does not affect the expiry date of the Warranty.**
5. For repairs after the expiry of the warranty period our Customer Care Centre will levy a nominal charge on components replaced.
6. The Warranty is valid only in the country of purchase.
7. Defective components which are exchanged both under 'Chargeable' & 'Free of Charge' basis, become the property of the Company.
8. All our Customer Care Centres display a list showing the MAXIMUM RETAIL PRICE of all Mixie spares.
9. If the Mixie is tampered with or opened by any unauthorised person, the Warranty is void.
10. Warranty is void if the Mixie is used for any purpose other than domestic use.



MG 155

YOUR COMMENTS on the performance of your Mixie and suggestions for product improvement. IN CASE OF COMPLAINTS write to us directly or call Tel. No.: 91-44-2432 8822 (Chennai).

Sender's Name & Address (in BLOCK LETTERS):



SALE DETAILS

MG 155

Date Sold: Sl. No.:



1306015126

Purchaser's Name & Address (in BLOCK LETTERS):

(To be returned to us through our dealer)

TECHNICAL SPECIFICATIONS

Model No. : MG 155
 Voltage : 110 V ~ 60 Hz.
 Power Consumption : 550 Watt
 Insulation : Class F
 Protection : Class 1
 Rating : Ordinary Total rated ON time
 30 minutes (max), Continuous
 ON for 5 minutes (max.) and
 OFF for 2 minutes (min.),
 Rest time 45 minutes
 Motor : Universal 550 Watt High Power Motor.
 No load speed 18,000 RPM (approx.)
 With load speed 10,500 RPM (approx.)
 Material of Body : A.B.S
 Material of Jars : Stainless Steel
 Material of Dome & L : P.P & P.C
 Blade Assemblies : Stainless Steel, Machine Ground and
 Polished.
 Speed Controls : Rotary Switch with 3 Speed and Incher.
 Flex Cord : PVC insulated 3 Core, Flexicord with
 (max.) 15 A Plugtop & earthing.
 Country of Origin : India

JAR CAPACITY

Jar	Size	Maximum Rated Capacity		
		Dry	Wet	Liquidise
Big Jar	1.7 litre	0.7 litre	0.5 litre	1.0 litre
Big Jar with FlexiLid	1.2 litre	0.5 litre	0.4 litre	0.6 litre
Medium Jar	1.0 litre	0.5 litre	0.4 litre	0.6 litre
Chutney Jar	0.4 litre	0.3 litre	0.2 litre	-

**Minimum Capacity for all the above
At least up to Blade level**

Gross Weight : 5.2 kgs (approx.)
 Size of Carton : 44 cm (L) x 24 cm (W) x 31 cm (H)
 Warranty : 1 Year

In pursuance with our policy of continuous product improvement, specifications are subject to change without notice.

Preethi Kitchen Appliances Pvt. Ltd.

Corporate Office : 3/140, I.T. Highway, Oggiam Thoraipakkam, Chennai - 600 097. Phone : 2496 0574, 2496 4477, Fax : 91 - 44 - 2496 0349, email: info@preethi.in, Website: www.preethi.in

QATAR

GOLDEN HOUSE
Blue Salon Building,
Suheim Bin Hamad Street,
P.O. Box 3750, Doha, Qatar
Tel: 97-44-478 606.
Fax: 97-44-791 138.

UAE:

ELEMENT MIDDLE EAST LLC,
P.O. Box 6218, Dubai.
Tel: 97-1-4-3530 987.
Fax: 97-1-4-3534 366.
email: elemenet@emirates.net.ae

BAHRAIN:

F.F. WATCH CO. WLL,
P.O. Box 164, Manama,
Kingdom Of Bahrain.
Tel: 97-33-253 729, 253 708.
Fax: 97-33-277 708.
email: abbas78@bbtelco.com.bh

KUWAIT

FIVE STAR EST.
Salhiya Fahed Al-Salem Street,
Al-Salamah Tower Mezzanine Floor
Shop No. 10, 11, 13, 14,
PO Box : 4734 Safat
Code No. - 13048. Kuwait.
Tel: 00965 2437630, 00965 2401482
Fax: 00965 2437630.
email: fivestar2005@yahoo.co.in
fivestar@gmail.com

SRI LANKA:

ESWARAN BROTHERS
MARKETING PVT.LTD.
Head Office: 267, Sea Street,
Colombo 11. Tel: 94-1-435 842,
432 599. email: ebmarket@sltnet.lk
Branches: 536, R.A. De Mel Mawatha,
Colombo 03.
Tel: 94-1-581 479, 587 240.
104/11, Grandpass Road,
Colombo 14.
Tel: 94-74-796 727, 796 796.

INDONESIA:

PT ANEKA DIMAS CO.,
Komplek Grenvil,
Kelurahan Duri Kencana, Jakarta 11510.
Tel: 62-21-6385 8674, 6385 8223.
Fax: 62-21-6313 039.
email: doi@dnnet.net.id

SINGAPORE:

MOHAMED MUHAMMAD TATA &
SAMSUDDIN CO. PTE LTD.,
145, SYED ALWALI ROAD,
SINGAPORE - 210 668
TEL : 6419066

JOTHI HOLDINGS PTE LTD

JOTHI'S BUILDING
1, Campbell Lane,
Singapore 200982
Tel : 6338 7000, 8 H/P : 98167425
Fax : 63380070
E-mail : jothi@jothistore@pacific.net.sg
Website : www.jothi.com.sg

